

LT8912B --- Product Brief

Single-Channel MIPI[®] DSI Bridge to LVDS/HD-DVI

1. Features

- **One-Channel MIPI[®] DSI Receiver**
 - Compliant with D-PHY1.1 and DSI1.02
 - 1 clock lane and 1~4 configurable data lanes
 - 80Mbps~1.5Gbps per data lane
 - Internal Rterm calibration less than 5% error
 - 2-bit programmable equalization
 - Only Continuous clock mode supported
- **One-Channel LVDS Transmitter**
 - 1 clock lane and 4 data lanes
 - Maximum 1.0Gbps per data lane
 - Reduced output swing for low EMI
- **HD-DVI Transmitter**
 - Support HD-DVI1.4 standard
 - Up to 60Hz 1080p 8-bit HD-DVI output
 - 7-bit automatic or manual output swing calibration
 - 3-bit programmable pre-emphasis
 - No DDC and HDCP support for LT8912B
- **Miscellaneous**
 - Single 1.8V supply power

2. General Description

The Lontium LT8912B MIPI[®] DSI to LVDS and HD-DVI bridge

features a single-channel MIPI[®] D-PHY receiver front-end configuration with 4 data lanes per channel operating at 1.5Gbps per data lane and a maximum input bandwidth up to 6Gbps.

For screen application, the bridge decodes MIPI[®] DSI 18bpp RGB666 and 24bpp RGB888 packets and converts the formatted video data stream to a compatible LVDS output operating at pixel clock operating from 25MHz to 154MHz, offering a single-link LVDS with 4 data lanes per link.

For TV application, the bridge provides a HD-DVI data output with optional SPDIF or 2-channel I2S serial audio input. Its high fidelity 2-channel I2S can transmit stereo up to a 192kHz sampling rate. The SPDIF can carry stereo LPCM audio or compressed audio, including Dolby[®] Digital and DTS[®].

3. Applications

- Mobile systems
- Digital still cameras, Digital video cameras
- Cellular Handsets
- Personal Media players
- Gaming

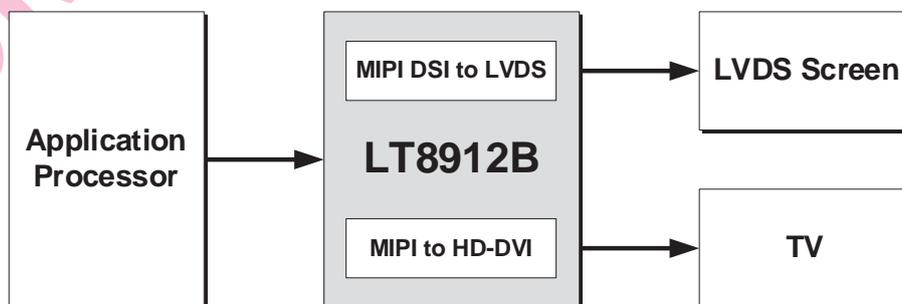


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method	MPQ
LT8912B	-40°C to +85°C	QFN64(7.5*7.5)	Tray	2600pcs

LONTIUM CONFIDENTIAL

Copyright © 2015-2024 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com