

LT9721 --- Product Brief

HD-DVI to eDP

1. Features

- **HD-DVI1.4 Receiver**
 - Support maximum 3.4Gbps input data rate
 - Support 3D Video Data Stream as specified in HD-DVI1.4
 - Support DDC Slave for EDID
 - Support Resolution up to 4Kx2K@30Hz for RGB
 - Support Hot-Plug Detect
 - No HEAC and CES (Consumer Electronics Service) Support
- **eDP1.4 Transmitter**
 - Compliant to VESA eDP1.4 Standard
 - Support 4 Lanes with 1.62Gbps (RBR), 2.7Gbps (HBR) Data Rate
 - Support 18/24-bit RGB
 - Support Hot-Plug Detect
 - Support Backlight Control for Screen Application
 - Optional SSC 0.5% Down-Spreading Output
 - Configurable Output Swing Internal Rterm Calibration with Less than 5% Error
- **Miscellaneous**
 - 1.8V/3.3V Dual Supply Power
 - External 25MHz Crystal Reference Clock
 - Temperature Range: -40°C to +85°C

- Packaged in 7.5mm x 7.5mm QFN64

2. General Description

The Lontium LT9721 is HD-DVI to eDP converter.

LT9721 features a HD-DVI1.4 receiver with 1 clock lane and 3 data lanes operating at maximum 3.4Gbps per data lane and a maximum input bandwidth of 10.2Gbps, allowing resolution up to 4Kx2K@30Hz for RGB format. The converter also integrates a DDC controller. The converter decodes the input 18/24-bit RGB packets and converts the formatted video data stream to a 4-lane eDP1.4 compliant output, supporting RBR(1.62Gbps) and HBR(2.7Gbps) link speeds. The build-in optional SSC function reduces EMI effect on EMI-concerned system application.

The LT9721 is fabricated in advanced CMOS process and implemented in 7.5mm x 7.5mm QFN64 package. This package is RoHS compliant and specified to operate from -40°C to +85°C.

3. Applications

- Notebook
- Advertising machine
- Cash register

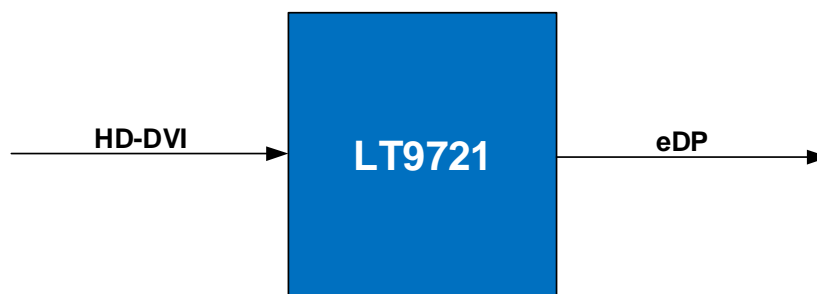


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method	MPQ
LT9721	-40°C to +85°C	QFN64 (7.5*7.5)	Tray	2600pcs

LONTIUM CONFIDENTIAL

Copyright © 2016-2024 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com