

LT8718 --- Product Brief

TTL to DP with Type-C

1. Features

● TTL Input

- Support up to 24-bit RGB/YUV and BT656/BT1120 Input
- Support SDR and DDR Data Sampling
- Support Resolution up to 4Kx2K@30Hz for RGB

● DP1.2 Transmitter

- Compliant to VESA DP1.2 Standard
- Support 4 Lanes with 1.62Gbps (RBR), 2.7Gbps (HBR) or 5.4Gbps (HBR2) Data Rate
- Support HDCP1.3 Encryption
- Support up to 24-bit RGB Data Format
- Support Resolution up to 4Kx2K@30Hz for RGB
- Build-in Pattern Generation
- Support Hot-Plug Detect
- Support Backlight Control for Screen Application
- Optional SSC 0.5% Down-Spreading Output
- Configurable Output Swing Internal Rterm Calibration with Less than 5% Error

● USB Type-C

- Compatible with USB3.1 Gen1, USB Type-C R1.0, DP Alt Mode V1.0 and USB PD R2.0
- 3 Data Roles Supported: DFP, UFP and DRP
- 2 Power Roles Supported: Source and Sink
- USB PD-PHY (Tx/Rx) and BMC Encoding/Decoding
- USB PD Protocol Control by Software
- Bi-directional Differential Passive Switch for USB3.1 Gen1 SS signal with less than 5.2-dB Insertion Loss, Controlled by Internal or External CC logic module
- USB Full-Featured, Orientation and Role Detection
- 3-level Current Ability Advertise (Host Mode) or Detection (Device Mode) for Type-C Power: USB Default, 1.5A@5V, 3A@5V
- SBU Data Path Control for DP Alt Mode

- OCP Control for External VBUS Power Switch
- Dead Battery Supports (Sink Mode) When No Power Applied

● Audio Input

- Support SPDIF or up to 8-CH I2S Audio Input

● Miscellaneous

- 1.8V/3.3V Dual Supply Power
- External 25MHz Crystal Reference Clock
- Temperature Range: -40°C to +85°C
- Packaged in 10mm x 10mm QFN88

2. General Description

The Lontium LT8718 is TTL to DP converter with internal Type-C Alternate Mode switch and PD controller.

The input supports both normal 24-bit RGB/YUV and BT656/BT1120 mode under SDR or DDR sampling. The maximum resolution is up to 4Kx2K@30Hz for RGB input. In order to be adaptable to the latest USB Type-C ecosystem, LT8718 integrates a high performance bi-directional passive differential switch controlled by CC logic and PD management unit to relieve mobile system design complexity and BOM cost. The switch function is compliant with VESA DP Alternate Mode on USB Type-C Standard.

The LT8718 is fabricated in advanced CMOS process and implemented in a small outline 10mmx10mm QFN88. This package is RoHS compliant and specified to operate from -40°C to +85°C.

3. Applications

- Mobile systems
- Cellular handsets
- Digital video cameras
- Digital still cameras

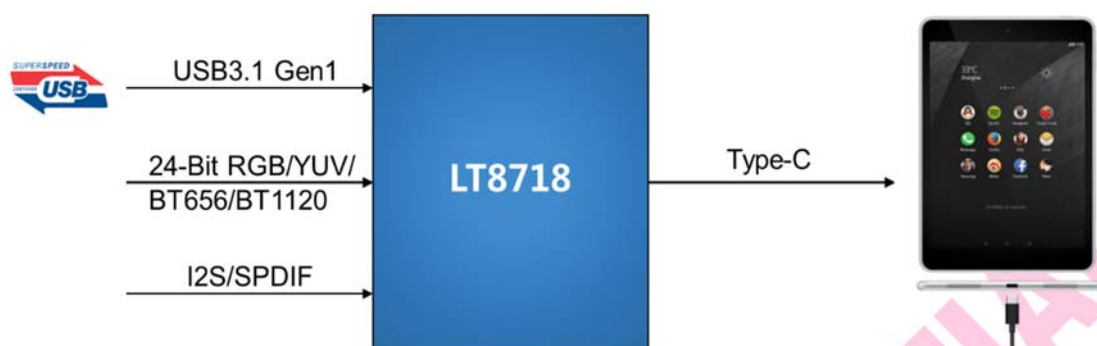


Figure 3.1 Application Diagrams

4. Ordering Information

Table 4.1 Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method	MPQ
LT8718	-40°C to +85°C	QFN88 (10*10)	Tray	1680pcs

Copyright © 2016-2021 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com