

LT6711GX --- Product Brief

HDMI2.1 to DP1.4 with Type-C

1. Features

● HDMI2.1 Receiver

- Compliant with HDMI2.1, HDMI2.0b, HDMI1.4 and DVI1.0
- Data rate up to 8Gbps
- Support HDCP 1.4/2.2/2.3
- Support HDCP repeater
- Support 8K@30Hz
- Support 4K@120Hz
- Support HDR10
- Support FEC
- Support CEC
- Support VRR
- Integrated EDID shadow (max 512-byte)

● DP1.4 Transmitter

- Compliant with DisplayPort specification 1.4 for 1.62Gbps, 2.7Gbps, 5.4Gbps, 8.1Gbps
- Compliant Embedded DisplayPort specification version 1.4
- Support DisplayPort 1/2/4 lanes
- Support HDCP 1.3/2.2/2.3
- Support HDCP repeater
- Support 8K@30Hz YUV 4:2:2 or YUV 4:2:0
- Support 4K@120Hz YUV 4:2:2 or YUV 4:2:0
- Support HDR10
- Support FEC
- Support Adaptive-Sync
- Support MCCC over AUX for eDP
- Support ASSR for eDP

● USB Type-C

- Compliant with VESA DisplayPort alt mode on USB Type-C standard 1.0
- DP alt mode only support pin assignment C、E

- Compliant with USB power delivery specification 3.0
- Compliant with USB Type-C cable and connector specification 1.3
- Built-in CC controller for charger and normal communication
- Data roles supported: DFP and UFP
- Power Roles Supported: source and sink

● Miscellaneous

- VESA DSC v1.2a (v1.1 compatible) decode and encode
- CSC: RGB <-> YUV444 <-> YUV422<-> YUV420
- Integrated 100/400KHz I2C slave
- Integrated microprocessor
- External oscillator 25MHz, +/-100ppm
- Embedded SPI flash for firmware and HDCP keys
- Firmware update through SPI or I2C interface
- Power supply: 3.3V for I/O and 1.1V for core

2. General Description

The LT6711GX is HDMI2.1 to DP1.4 converter with internal Type-C Alternate Mode switch and PD controller.

For HDMI2.1 input, LT6711GX can be configured as 3/4 lanes. Adaptive equalization makes it suitable for long cable application and the maximum bandwidth is up to 32Gbps. It allow for the highest resolutions of 8K@30Hz or 8K@60Hz with compression data.

For DP1.4 output, it consists of 4 data lanes, support 1.62, 2.7, 5.4 or 8.1Gbps link speeds. The build-in optional SSC function reduces EMI effect.

In order to be adaptable to the latest USB Type-C system, LT6711GX integrates a high performance bi-directional Super-Speed controlled by CC logic and PD management unit to relieve mobile system design complexity and BOM cost.

The device is capable of automatic operation which is

enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the configuration I2C

slave interface.

LT6711GX is fabricated in advanced CMOS process and implemented in 10mmx10mm QFN88 package.

3. Applications

- Mobile systems, VR/AR
- Digital video cameras and Digital still cameras
- Cellular handsets, PAD/Tablets

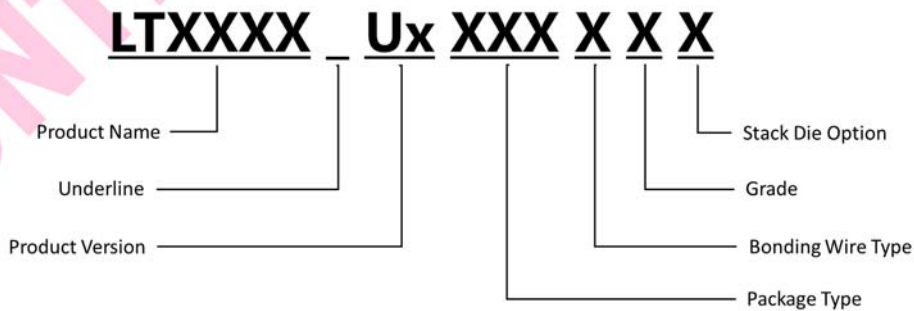


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT6711GX	LT6711GX_U2Q02AED	Preview	QFN88 (10*10)Saw	Au	Consumer	TBD	D	Tray	1680pcs



Note: No spaces in the P/N name.

Figure 4.1 Part Number Naming Rules

Copyright © 2021 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com