

# LT86121EX --- Product Brief

## HDMI2.1 Repeater with DSC Encoder

### 1. Features

#### ● HDMI2.1 Receiver

- Compliant with HDMI2.1, HDMI2.0b, HDMI1.4 and DVI1.0
- Data rate up to 8Gbps
- Support HDCP 1.4/2.3
- Support HDCP repeater
- Support RGB 8/10/12 bpc, YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0 /8/10/12 bpc
- Support up to 8K@30Hz RGB/YCbCr4:4:4/YCbCr4:2:2 8bpc or YCbCr4:2:0 12 bpc
- Support up to 4K@120Hz RGB/YCbCr4:4:4/YCbCr4:2:2 8bpc or YCbCr4:2:0 12 bpc
- Support up to 8K@60Hz DSC bitstream bypass
- Support static HDR10
- Support FEC
- Support VRR
- Support CEC
- Integrated EDID shadow (max 512-byte)

#### ● Type-C

- Compliant with VESA DisplayPort Alt Mode on USB Type-C Standard 2.0
- DP Alt Mode support pin assignment C, D and E
- Compliant with USB power delivery specification 3.0
- Compliant with USB Type-C cable and connector specification 1.3
- Built-in dual CC controllers for charger and normal communication
- Data roles supported: DFP, UFP and DRP
- Power roles supported: source and sink
- Support USB Billboard function

#### ● DP1.4a Receiver

- Compliant with DisplayPort specification 1.4a for

1.62Gbps, 2.7Gbps, 5.4Gbps and 8.1Gbps

- Compliant with Embedded DisplayPort specification version 1.4b
- Support DisplayPort 1/2/4 lanes
- Support HDCP 1.3/2.3
- Support HDCP repeater
- Support RGB 6/8/10/12 bpc, YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0 8/10/12 bpc
- Support up to 8K@30Hz YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support up to 4K@120Hz YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support up to 8K@60Hz DSC bitstream bypass
- Support static HDR10
- Support FEC
- Support ASSR for eDP

#### ● HDMI2.1 Transmitter

- Compliant with HDMI2.1, HDMI2.0b, HDMI1.4 and DVI1.0
- Data rate up to 8Gbps
- Support HDCP 1.4/2.3
- Support HDCP repeater
- Support RGB 8/10/12 bpc, YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0 /8/10/12 bpc
- Support up to 8K@30Hz RGB/YCbCr4:4:4/YCbCr4:2:2 8bpc or YCbCr4:2:0 12 bpc
- Support up to 4K@120Hz RGB/YCbCr4:4:4/YCbCr4:2:2 8bpc or YCbCr4:2:0 12 bpc
- Support up to 8K@60Hz DSC bitstream bypass
- Support static HDR10
- Support FEC
- Support VRR
- Support CEC

#### ● DP1.4a Transmitter

- Compliant with DisplayPort specification 1.4a for 1.62Gbps, 2.7Gbps, 5.4Gbps, 8.1Gbps
- Compliant Embedded DisplayPort specification version 1.4b
- Support DisplayPort 1/2/4 lanes
- Support HDCP 1.3/2.3
- Support HDCP repeater
- Support RGB 6/8/10/12 bpc, YCbCr4:4:4/YCbCr4:2:2/YCbCr4:2:0 8/10/12 bpc and DSC
- Support up to 8K@30Hz YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support up to 4K@120Hz YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support up to 8K@60Hz DSC bitstream bypass
- Support static HDR10
- Support FEC
- Support Adaptive-Sync
- Support ASSR for eDP

**● Digital Audio input or Output**

- I2S interface supports up to 8-channel audio, with sample rates of 32~192 KHz and sample sizes of 16~24 bits
- SPDIF interface supports PCM, dolby digital, DTS digital audio at up to 192KHz frame rate
- Compliant with IEC60958 or IEC61937

**● DSC Decoder and Encoder**

- Compliant with DSC 1.2a
- Support up to hactive 4096
- Support up to pixel clock 1.2GHz
- Support 1/2/4 slices
- Support color space RGB, YCbCr4:4:4, YCbCr4:2:2, and YCbCr4:2:0
- Support color depth 8bit and 10bit
- Support bpp precision 1 bit
- Support only constant refresh rate

**● Miscellaneous**

- CSC: RGB <-> YUV444 <-> YUV422<-> YUV420
- Integrated 100/400KHz I2C slave
- Integrated microprocessor
- External oscillator 25MHz, +/-50ppm
- Embedded SPI flash for firmware and HDCP keys
- Firmware update through SPI or I2C or USB interface
- Power supply: 3.3V and 1.1V

## 2. General Description

The LT86121EX is a high performance HDMI2.1 repeater designed for long cable application. It should be paired with LT86121EX for longest cable reach.

Both the HDMI2.1 input and output support data rate up to 8Gbps which provides sufficient bandwidth for 4K@120Hz video. Also HDCP2.3 is supported for data decryption.

In paired mode, DSC encoder can be used to reduce data rate and hence bandwidth requirement.

Furthermore, FEC can be activated to correct data error and help to enhance system error tolerance level. These unique techniques together will significantly extend transmission distance.

Two digital audio output interfaces are available, I2S and SPDIF. The I2S interface supports 8-ch LPCM and the SPDIF interface supports 2-ch LPCM or compressed audio, both at maximum 192 KHz sample rate.

The device is capable of automatic operation which is enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the configuration I2C slave interface.

LT86121EX is fabricated in advanced CMOS process and implemented in 10mmx10mm QFN88 package.

### 3. Applications

- Active Cables
- Surveillance

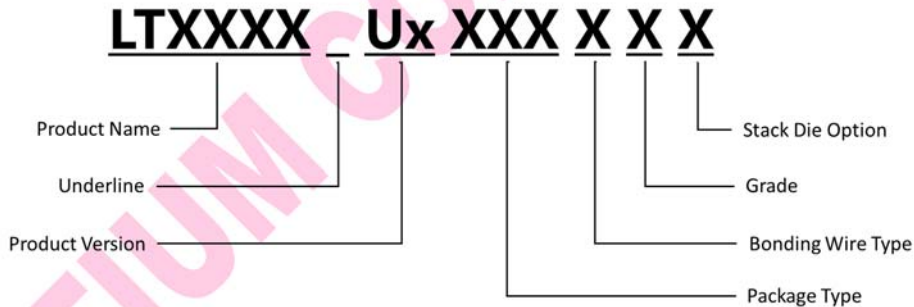


Figure 3.1 Application Diagram

### 4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT86121EX	LT86121EX_U3Q02AED	Preview	QFN88 (10*10)Saw	Au	E	TBD	D	Tray	1680pcs



Note: No spaces in the P/N name.

Figure 4.1 Part Number Naming Rules

Copyright © 2019-2022 Lontium Semiconductor Corporation, All rights reserved.

### **Lontium Semiconductor Proprietary & Confidential**

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

### **Trademarks**

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: [www.lontiumsemi.com](http://www.lontiumsemi.com)

Technical support: [support@lontium.com](mailto:support@lontium.com)

Sales: [sales@lontium.com](mailto:sales@lontium.com)