

LT8711UX --- Product Brief

Type-C/DP1.2 to HD-DVI2.0 Converter

1. Features

● USB Type-C

- Compliant with VESA DisplayPort Alt Mode on USB Type-C Standard V1.0
- Compliant with USB Power Delivery Specification R2.0, V1.0
- Compatible with USB Type-C Cable and Connector Specification R1.2
- Built-in CC controller for plug and orientation detection
- Dual CC ports for charger and normal communication

● DP1.2 Receiver

- Compliant with VESA DP1.2
- Support 1.62/2.7/5.4Gbps
- Support 1/2/4 lanes
- Support SSC
- Compliant with HDCP1.3
- Adaptive receiver equalization for PCB, cable and connector losses
- Support lane swap(arbitrarily) and polarity inversion(independent)

● HD-DVI2.0 Transmitter

- Compliant with HD-DVI2.0, HD-DVI1.4 and DVI1.0
- Compliant with HDCP2.2 and HDCP1.4
- Data rate up to 6Gbps
- Support UHD 4k@60Hz(RGB and YCbCr 4:4:4)
- Support CES (Consumer Electronics Service)
- Programmable transmitter swing and pre-emphasis

● Digital Audio Outputs

- I2S and SPDIF interface(SPDIF shared with SD0)
- 2-channel LPCM or compressed audio
- Sample rate up to 192kHz

● Miscellaneous

- External oscillator
- Integrated microprocessor
- Embedded SPI flash for firmware and HDCP keys

- Integrated 100/400kHz I2C slave
- Firmware update through SPI or I2C interface
- Power supply: 3.3V for I/O and 1.2V for core

2. General Description

The LT8711UX is a high performance Type-C/DP1.2 to HD-DVI2.0 converter, designed to connect a USB Type-C source or a DP1.2 source to an HD-DVI2.0 sink. The LT8711UX integrates a DP1.2 compliant receiver, and an HD-DVI2.0 compliant transmitter. Also, two CC controllers are included for CC communication to implement DP Alt Mode and power delivery function, one for upstream Type-C port and another for downstream port.

The DP interface comprises 4 main lanes, AUX channel, and HPD signal. The receiver supports maximum 5.4Gbps (HBR2) data rate per lane. The DP receiver incorporates HDCP1.3 content protection scheme with embedded key for secure transmission of digital audio-video content.

The HD-DVI interface includes 4 TMDS clock/data pairs, DDC, and HPD signal. The HD-DVI transmitter is capable of supporting up to 6Gbps data rate, quite adequate for handling video resolutions up to UHD 4k 60Hz formats. The HD-DVI transmitter incorporates HDCP engines which support both HDCP1.4 and HDCP2.2. With the inclusion of HDCP, the LT8711UX allows secure transmission of protected content. Embedded key is available that provides the highest level of HDCP key security.

Besides digital video output interface, the LT8711UX also provides digital audio output interfaces: I2S and SPDIF. The audio stream is extracted and recovered from DP data stream, and then routed to digital audio outputs or HD-DVI output. The device supports 2-channel LPCM or compressed audio at maximum 192kHz sample rate.

The device is capable of automatic operation which is

enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the use of a dedicated configuration I2C slave interface.

3. Applications

- Docking station
- Dongle

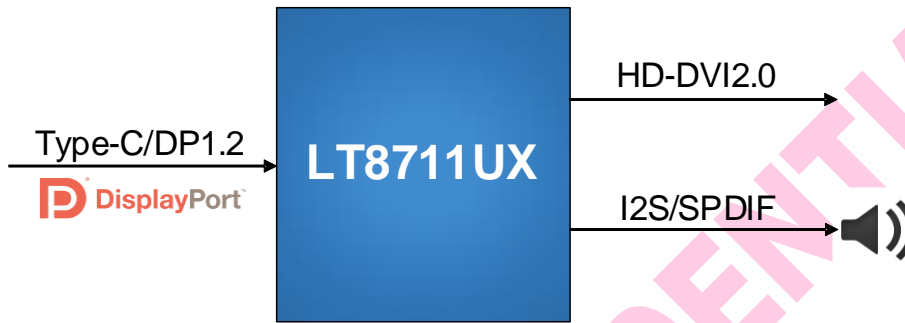


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Part Number	Product Version	Product Status	Operating Temperature Range	Package	Packing Method	MPQ
LT8711UX	U3	MP	-40°C to +85°C	QFN88 (10*10)	Tray	1680pcs
LT8711UX-AU	U3	MP	-40°C to +85°C	QFN88 (10*10)	Tray	1680pcs

MP: Mass Production.

Note: The suffix –AU denotes that it is an automotive grade device which is qualified by AEC-Q100 grade 3 testing.

Copyright © 2016-2024 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com