

# LT947LMT --- Product Brief

## Automotive Serializer

### 1. Features

- **LVDS Receiver**
  - Compatible with VESA, JEIDA standard
  - 1/2 configurable port with 1 clock lane and 4 data lanes per each port for VESA and JEIDA standard
  - Configurable sync code detected
  - Data rate up to 1.2Gbps
- **MIPI DSI/CSI Receiver**
  - Compliant with D-PHY1.2 & DSI 1.3 & CSI-2 1.3
  - 1/2 configurable port
  - 1 clock lane and 1/2/4 configurable data lanes for each port; 2.5Gbps per data lane
- **TTL Receiver**
  - 20-lane SDR/DDR Sampling Support
  - Max Pixel Clock 74.25MHz
- **Automotive Display Port Transmitter**
  - 1/2 configurable link
  - Bidirectional transmission with maximum 8.1Gbps/lane forward data channel and max 29.7Mbps back control channel.
  - Transmit video, I2C data and audio on the forward data channel with scrambling, DC balance and FEC
  - Carry I2C data and interrupt from back control channel with DC balance and ECC
  - Maximum 5m transmission distance for 8.1Gbps, and

maximum 15m transmission distance for lower speed, depending on the attenuation of cable.

- Typical resolution 4K RGB888 60Hz with 2 lanes

- **Miscellaneous**

- DeSSC for receiver and SSC for transmitter
- Interrupt output
- Temperature and Voltage sensing
- Integrated 100KHz, 400KHz, 1MHz I2C slave
- 2-channel I2S slave
- 1.8V power for core and 1.8/3.3V power for IO
- POC/POE
- AEC-Q100 Grade 2

### 2. General Description

The LT947LMT serializer is a part of Lontium's long distance video transmission family for Advanced Driver Assistance Systems (ADAS), designed to provide a solution for LVDS, MIPI and TTL video transmission with a maximum 15m coax (POC) or STP cable. The chip delivers an 8.1Gbps/lane forward data channel and back control channel and supports power over each cable.

### 3. Applications

- Automotive Display Application
- LVDS/MIPI/TTL Extender


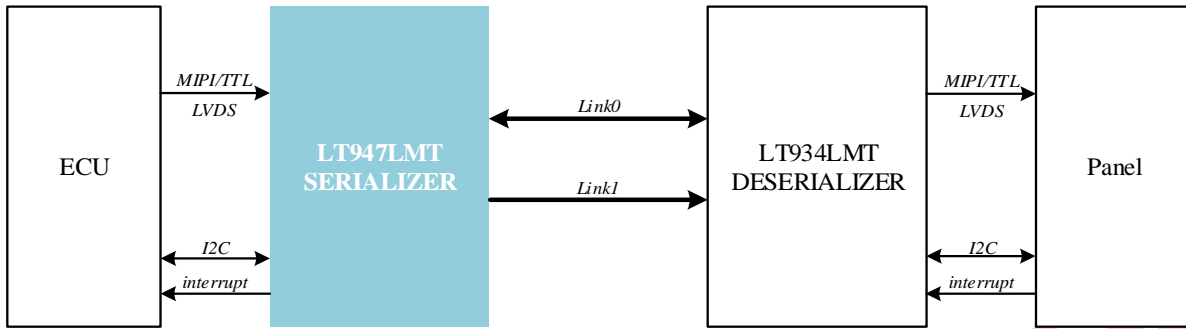


Figure 3.1 Application Diagram

## 4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT947LMT04	LT947LMT04_U1Q10CAN	Preview	QFN48 (6*6)Saw	Cu	A	-40°C to +105°C	N	Tray	TBD
LT947LMT06	LT947LMT06_U1Q10CAN	Preview	QFN48 (6*6)Saw	Cu	A	-40°C to +105°C	N	Tray	TBD
LT947LMT08	LT947LMT08_U1Q10CAN	Preview	QFN48 (6*6)Saw	Cu	A	-40°C to +105°C	N	Tray	TBD

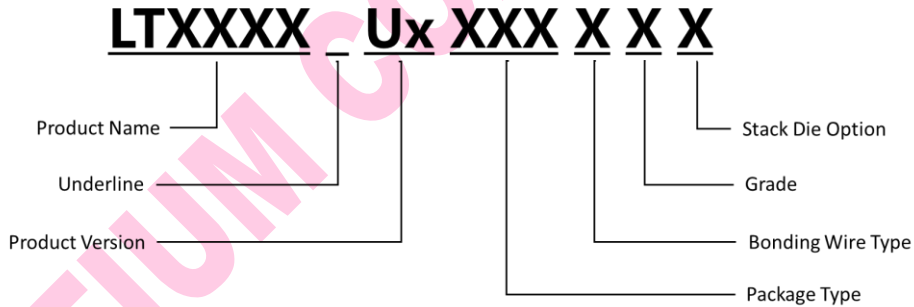

Note: No spaces in the P/N name.

Figure 4.1 Part Number Naming Rules

Copyright © 2020-2024 Lontium Semiconductor Corporation, All rights reserved.

### **Lontium Semiconductor Proprietary & Confidential**

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

### **Trademarks**

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: [www.lontiumsemi.com](http://www.lontiumsemi.com)

Technical support: [support@lontium.com](mailto:support@lontium.com)

Sales: [sales@lontium.com](mailto:sales@lontium.com)