

LT87101C --- Product Brief

Type-C Re-driver

1. Features

- Compliant to Type-C r1.2 Standard
- Compatible with USB3.1 Gen-1 and USB2.0 Standard
- Support DP Alt Mode with Pin Assignment C,D,E&F
- Support HDMI1.4b Alternate Mode
- Support CC Interception via USB PD2.0
- Support SOP'/SOP'' Communication
- Support up to 5.4Gb/s Data Rates
- Integrate AUX Interception
- Programmable Input Equalization
- Programmable Output Swing and De-emphasis
- Automatic recognition of cable plug insertion side
- Internal MCU and Flash for Firmware Upgrade
- Support External I2C Debug
- 1.8V/3.3V Power Supply
- Packaged in 5mmx5mm QFN40

2. General Description

LT87101C is an active EMCA chip for full-featured USB Type-C cable. It supports SOP/SOP'/SOP'' interaction providing a scheme to determine the characteristics of the cable through PD2.0-based CC communication. Signal quality is deeply-optimized and enhanced by performing cable or board trace loss compensation under USB2.0, USB3.1 Gen-1, HDMI1.4b and DP1.2 specification respectively according to application.

The four Type-C signal differential pairs, TX1+/- (A2/A3), TX2+/- (B2/B3), RX1+/- (A11/A10) and RX2+/- (B11/B10) are re-shaped through four bi-directional receiver-transmitter channels, where TX1+/- and RX1+/- are swappable with TX2+/- and RX2+/- respectively. The polarity of each differential pair is also swappable. Especially, the position of Plug-A and Plug-B can also be exchanged. EMCA embedded with LT87101C will automatically identify which side of the cable is inserted to Type-C source and configure the data transmission

direction accordingly. The input receiver of LT87101C implements a multi-level programmable linear equalizer, supporting up to 25dB loss compensation due to Inter-Symbol Interference (ISI). The transmitter re-drives the received signal with multi-level programmable output swing and maximum 6dB de-emphasis. USB2.0 data D+/D- is also equalized and re-driven inside LT87101C.

A Low-Frequency Periodic Signal (LFPS) detection block, automatic plug and unplug by remote receiver termination sensing and state machine control are also integrated on each channel for normal USB3.1 Gen-1 application. The build-in AUX interceptor monitors AUX communication and automatically adjust equalizing and signaling levels in response to DP Link Training Commands.

LT87101C internally integrates an 8-bit OCM and flash memory (stacked die) to configure and run program. Online software upgrade is also supported.

The LT87101C is fabricated in advanced CMOS process and implemented in a small outline 5mmx5mm QFN40 package. This package is RoHS compliant and specified to operate from -40°C to +85°C.

3. Applications

- Smartphone, Tablet and Other Mobile Devices
- VR/AR Helmet Display and Home Entertainment
- PC, Notebook, All-in-Ones Computer and Docking
- Active Type-C EMCA Cable

4. Ordering Information

Table 4.1.1 Ordering Information

Part No.	Operating Temp. Range	Package	Packing
LT87101C	-40°C to +85°C	QFN40 (5*5)	Tray

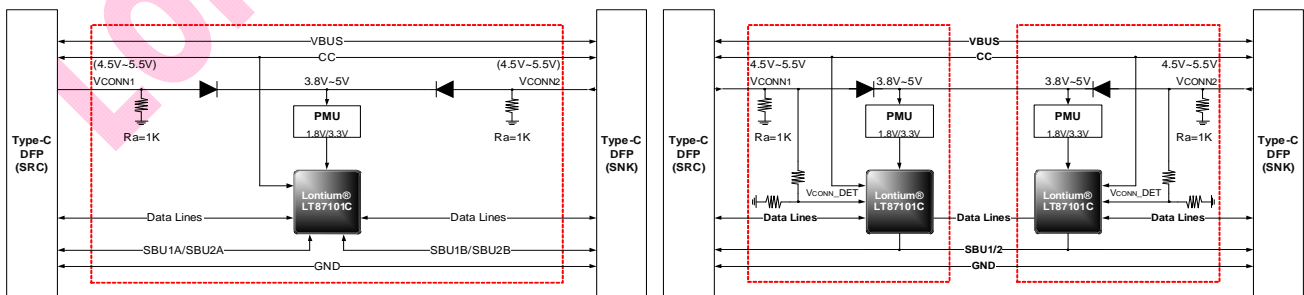


Figure 1. LT87101C Typical Application Diagram

Copyright © 2017 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com