

# LT8311SX --- Product Brief

## USB2.0 Extender with Integrated MCU

### 1. Features

- **USB2.0 Extender**
  - Support HS/FS/LS mode
  - Extended USB communication distance over CAT6 Ethernet cable: up to 60m for HS/FS, and up to 130m for LS
  - Single pair operation
  - Transparent to USB hosts and devices (driver free)
  - Support hot plug
  - Used in pairs
- **Miscellaneous**
  - External oscillator
  - Integrated microprocessor
  - Embedded SPI flash for firmware storage
  - GPIOs for system control
  - Integrated 100/400kHz I2C slave
  - Firmware update through SPI or I2C interface

### 2. General Description

The LT8311SX is a high performance USB2.0 extender which provides USB signal repeating over Ethernet

cable or standard USB cable. Compliant with USB2.0 specification, the LT8311SX support high speed, full speed and low speed communication. It extends USB2.0 HS transmission distance up to 60m at 480Mbps therefore eliminates the 5m limitation by USB2.0 specification. Also, user defined packet is supported which provides a path for sideband data communication. It is designed for long cable application and thus ideal for extending the reach of USB2.0 I/O devices such as USB2.0 cameras, hard drivers, flash drivers, printers, scanners, etc.

The device is capable of automatic operation which is enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the configuration I2C slave interface.

### 3. Applications

- Surveillance
- KVM Extension
- Car System

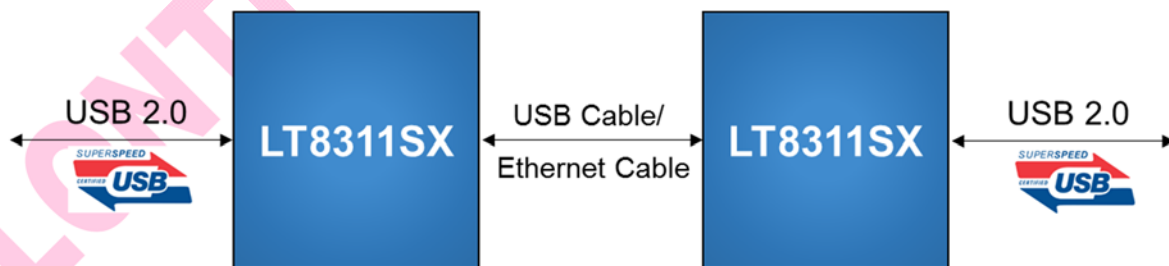


Figure 3.1 Application Diagram

## 4. Ordering Information

Table 4.1 Ordering Information

Part Number	Product Version	Product Status	Operating Temperature Range	Package	Packing Method	MPQ
LT8311SX	U4	MP	-40°C to +85°C	QFN64 (7.5*7.5)	Tray	2600pcs
MP: Mass Production.						

LONTIUM CONFIDENTIAL

**Copyright © 2018-2022 Lontium Semiconductor Corporation, All rights reserved.**

### **Lontium Semiconductor Proprietary & Confidential**

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

### **Trademarks**

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

**Visit our corporate web page at: [www.lontiumsemi.com](http://www.lontiumsemi.com)**

**Technical support: [support@lontium.com](mailto:support@lontium.com)**

**Sales: [sales@lontium.com](mailto:sales@lontium.com)**