

LT8712SX --- Product Brief

Type-C/DP1.4 to Dual-Port DP1.4/HDMI2.0 Converter with Audio

1. Features

● USB Type-C

- Compliant with VESA DisplayPort Alt Mode on USB Type-C Standard 1.0b
- DP Alt Mode support pin assignment C, D and E
- Compliant with USB power delivery specification 3.0
- Compliant with USB Type-C cable and connector specification 1.3
- Built-in two CC logic and PD controller for charger and normal communication
- Support UFP and DFP data roles
- Support source, sink and DRP power roles
- Support USB Billboard

● DP1.4a/eDP1.5 Receiver

- Compliant with DisplayPort specification 1.4a for 1.62Gbps, 2.7Gbps, 5.4Gbps and 8.1Gbps
- Compliant with Embedded DisplayPort specification version 1.5
- Support SSC (de-spreading)
- Support DisplayPort 1/2/4 lanes
- Support FEC
- Support ASSR for eDP
- Support HDCP 1.3/2.3
- Support HDCP repeater
- Support SST/MST mode
- Support recovery up to two different video displays
- Support RGB 6/8/10/12 bpc, YCbCr4:4:4/YCbCr4:2:2/YCbCr4:2:0 8/10/12 bpc
- Support up to 4K@144Hz RGB 6bpc, YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support DSC pass-through
- Support HDR10
- Support Horizontal Blanking Expansion
- Support lane swap and PN swap

● DP/DP++/HDMI Combo Transmitters

▪ 2 x DP1.4a Transmitters

- Compliant with DisplayPort specification 1.4a for 1.62Gbps, 2.7Gbps, 5.4Gbps, 8.1Gbps
- Compliant Embedded DisplayPort specification version 1.5
- Support DisplayPort 1/2/4 lanes
- Support HDCP 1.3/2.3
- Support RGB 6/8/10/12 bpc, YCbCr4:4:4/YCbCr4:2:2/YCbCr4:2:0 8/10/12 bpc
- Support up to 4K@144Hz RGB 6bpc, YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support DSC pass-through
- Support HDR10
- Support FEC
- Support ASSR for eDP
- Support Horizontal Blanking Expansion
- Support SSC
- Support Type-C output
- Support original stream pass through (only DTX1)
- Support lane swap and PN swap

▪ 2 x HDMI2.0/DP++ Transmitters

- Compliant with HDMI2.0, HDMI1.4 and DVI1.0
- Integrated HDCP2.3 engine and HDCP1.4 engine
- Data rate up to 6Gbps
- Support TMDS scrambling for EMI/RFI reduction
- Support SCDC
- AC-couple capable
- Programmable transmitter swing and pre-emphasis
- Downstream receiver sensing
- Support lane swap and PN swap
- 5V tolerance DDC/HPD I/Os

● Digital Audio Outputs

- I2S interface supports up to 2-channel audio, with sample rates of 32~192 KHz and sample sizes of 16~24 bits

- TDM output interface supports up to 8-channel audio, with sample rates of 32~192 KHz and sample sizes of 16~24 bits
- SPDIF interface supports LPCM, Dolby Digital, DTS digital audio up to 192KHz frame rate
- Compliant with IEC60958 or IEC61937

● DSC Decoder

- Compliant with DSC 1.2a
- Support dual DSC decoder
- Support up to hactive 4096
- Support up to pixel clock 1.44GHz
- Support 1/2/4 slices
- Support color space RGB, YCbCr4:4:4, YCbCr4:2:2, and YCbCr4:2:0
- Support color depth 8bit and 10bit
- Support bpp precision 1/16 bit

● Miscellaneous

- CSC: RGB <-> YCbCr4:4:4 <-> YCbCr4:2:2<-> YCbCr4:2:0
- Integrated 100/400KHz I2C slave
- Integrated microprocessor
- External oscillator 27MHz, +/-50ppm
- Embedded SPI flash for firmware and HDCP keys
- Firmware update through I2C or USB interface
- Power supply: 3.3V and 1.15V

2. General Description

The LT8712SX is a high performance Type-C/DP1.4 to

Type-C/DP1.4/HDMI2.0/DP++ converter, with two configurable DP1.4/HDMI2.0 output interfaces and audio output interface. LT8712SX supports both the DisplayPort™ Single Stream Transport (SST) mode and Multi-Stream Transport (MST) mode. When receiving the multiple video/audio streams which are packetized and transmitted over a single DP link, LT8712SX recovers the packetized Multi-streams to multiple different video/audio streams. In SST mode, two TX interfaces output the same video stream/audio stream. Also, two CC controllers are included for CC communication to implement DP Alt Mode and power delivery function. On-chip USB3.2 Gen1 switch is a high-speed bi-directional switch which provides flexible switching to accommodate connector flipping. Digital audio output interfaces are available, including I2S/TDM/SPDIF.

The device is capable of automatic operation which is enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the use of a dedicated configuration I2C slave interface.

3. Applications

- Docking Station
- Video Hub
- Dongle

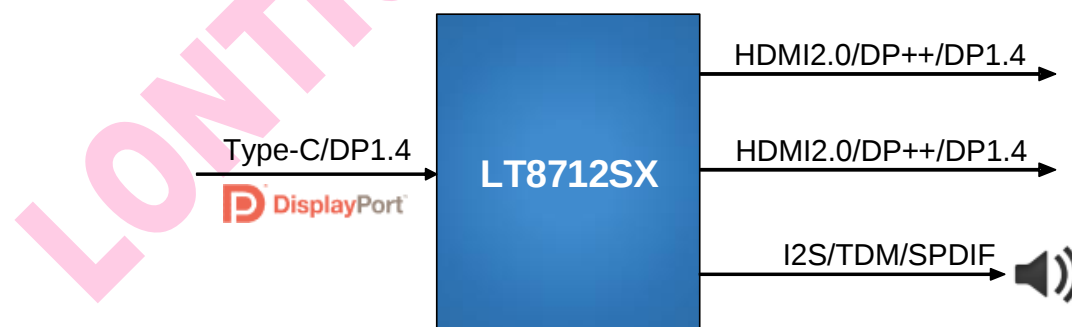


Figure 3.1. Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT8712SX	LT8712SX_U3Q02CED	Preview	QFN88 (10*10)Saw	Cu	E	-40°C to +85°C	D	Tray	1680 pcs
	LT8712SX_U3Q02CAD	Preview	QFN88 (10*10)Saw	Cu	A	TBD	D	Tray	1680 pcs

Note: LT8712SX_U3Q02CAD is an automotive grade device which is qualified by AEC-Q100 Grade 2 testing.

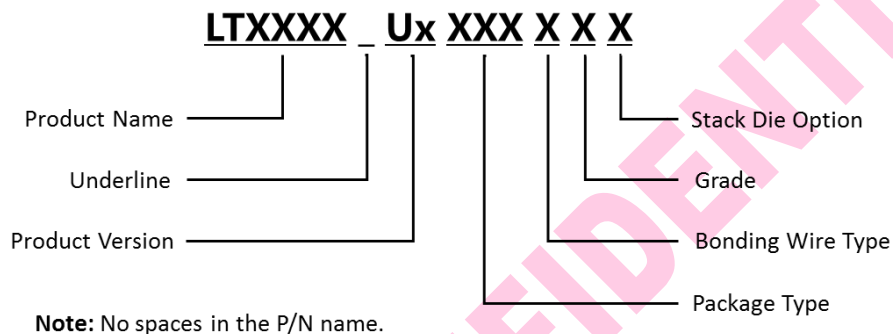


Figure 4.1 Part Number Naming Rules

Copyright © 2023-2025 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com