

LT86101UX --- Product Brief

HDMI/DVI Repeater

Features

- Compatible with HDMI 1.4, supports 3.4Gbps data rate
- Supports 3D video formats and 4Kx2K extended resolution formats
- Adaptive receive equalization up to 40dB to compensate for long/cheap cable losses
- ODTs and calibration for better signal integrity
- Separate ODT supply for AC-coupled applications
- Configurable transmit de-emphasis up to -9dB to precompensate signal distortion
- Integrated back-termination to improve output signal quality
- 5V-tolerant DDC buffer
- Extends cable length as follows: (RX-side + TX-side)
 - Up to (55m + 20m) over 26 AWG STP HDMI cable @ 1.65Gbps
 - Up to (35m + 20m) over 26 AWG STP HDMI cable @ 2.25Gbps
 - Up to (25m + 15m) over 28 AWG STP HDMI cable @ 1.65Gbps
 - Up to (15m + 10m) over 28 AWG STP HDMI cable @

2.25Gbps

- Cascadable for further cable reach
- Dual control modes for flexible applications
- Link activity detection to enable squelch option
- Power dissipation of 0.75W typical
- ESD rating: HBM at ±6kV
- 7mm x 7mm 48-pin QFN lead-free package

Description

LT86101UX is Lontium's 4th generation HDMI/DVI repeater based on ClearEdge $^{\text{TM}}$ Technology, compliant with the HDMI 1.4 (High Definition Multimedia Interface) specification. It is a 10.2Gbps (3 x 3.4Gbps) high performance re-clocking device that supports 3 TMDS data channels and a single clock channel.

Applications

- TMDS cable equalizer
- HD televisions and displays
- DVI/HDMI cable-extender modules
- Cable assemblies

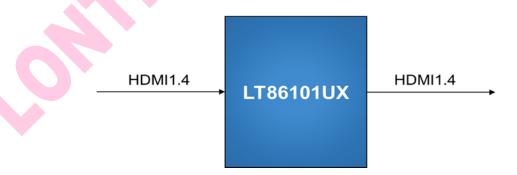


Figure 1. Application Diagram



Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method
LT86101UX	0° C to 70° C	QFN48 (7*7)	Tray





LT86101UX ADVANCE INFORMATION – CONFIDENTIAL AND PROPRIETARY

Copyright © 2016-2017 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISH IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium[™] and ClearEdge[™] is a registered trademark of Lontium Semiconductor.All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com